



MULTIPURPOSE WATERTIGHT LUMINAIRE FOR DECKS, STORES, ENGINE ROOMS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Cover	Opal polycarbonate
Mounting	2 mounting holes, Ø 9 mm
Cable entry	2 cable glands M20, nickel plated brass
Protection class	IP67
Weight	1.5 kg
Light source	LED module
Wattage	Max. 4 W / HO: max. 6 W
CCT (color)	4,000 K
Luminous flux	350 lm / HO: 950 lm
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

TL09	5105009800-004
TL09 HO	5105013500-xxx


SPARE PARTS

PART NO.

Opal cover	7925000800
------------	------------

EXTRAS

- > Stainless steel housing
- > Emergency battery back-up
- > Different cable glands
- > 120 V AC execution

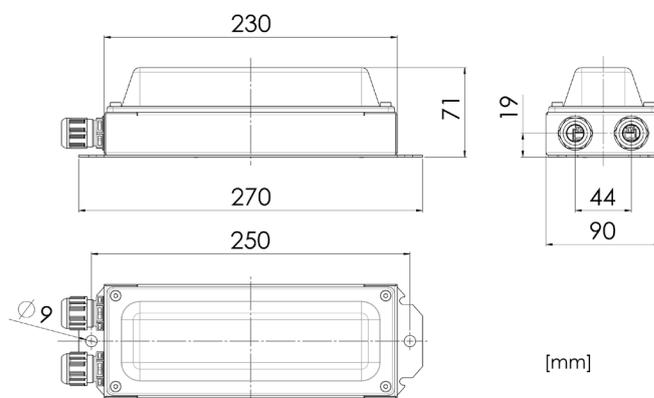

[mm]

