

CEILING LED LUMINAIRE, SURFACE MOUNTING FOR PASSAGE WAYS, CABINS, LOUNGES, ACCOMMODATION AREAS

Design According to rules of maritime classification societies, additional VDE and IEC

Housing Galvanized steel, powder coated white (RAL9016)

Diffuser Opal polycarbonate

Mounting Mounting holes $6 \times \varnothing 6$ mm

Cable entry 30×16 mm or 2 \times grommets

Protection class IP20 or IP44

Weight 4.0 kg

Wattage Max. 32 W

CCT (color) 3,000 K

Luminous flux 3,300 lm

CRI ≥ 80

Voltage 220–240 V AC

Frequency 50–60 Hz

PART NO.


DA Flex L IP20 5112008900-005

DA Flex L IP44 5112010700-001

EXTRAS

- > Motion sensor
- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Different color temperatures

IP20

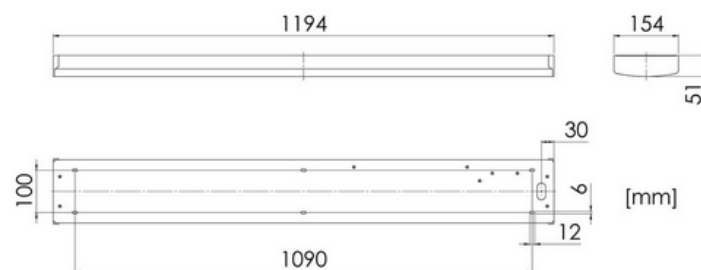

IP44

