


PART NO.

DA25 Eco	5112014400-001
DA25 HO	5112014500-001
DA25 HO DALI	5112014500-002





★ EXTRAS

- > 4,000 K
- > 120 V AC execution
- > Black housing
- > Dimmable 1–10 V

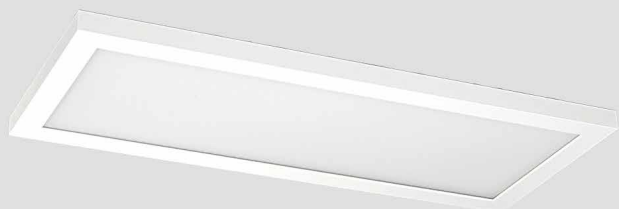

CEILING LED LUMINAIRE, SURFACE MOUNTING
FOR PASSAGE WAYS, CABINS, LOUNGES,
ACCOMMODATION AREAS AND OFFICES

Design	According to rules of maritime classification societies, additional VDE and IEC
Housing	Aluminium powder coated white (RAL9016)
Diffuser	Polycarbonate prismatic
Mounting	Mounting holes 6 × Ø 6 mm
Connection type	Connection cable with Wago 3-pole plug
Protection class	IP44
Weight	2.7 kg
Wattage	Eco: max. 12 W / HO: 24 W
CCT (color)	3,000 K
Luminous flux	Eco: 1,200 lm / HO: 2,400 lm
UGR	≤ 19
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz
Power supply	Remote LED driver



[mm]

