

RECESSED MOUNTED CEILING LUMINAIRE FOR  
ACCOMMODATION AND PUBLIC AREAS

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Galvanized steel, powder coated white (RAL9016)
<b>Diffuser</b>	Clear polycarbonate, ice crystal structure
<b>Mounting</b>	Mounting set for ceilings 23–55 mm
<b>Cable entry</b>	2 inlets for cables max. Ø 13 mm
<b>Protection class</b>	IP20 / IP44 in conjunction with ceiling, IP20 with louver
<b>Weight</b>	7.9 kg
<b>Light source</b>	Linear LP LED modules
<b>Wattage</b>	Max. 40 W
<b>CCT (color)</b>	3,000 K or 4,000 K
<b>Luminous flux</b>	3,100 lm
<b>CRI</b>	≥ 80
<b>Voltage</b>	220–240 V AC
<b>Frequency</b>	50–60 Hz

## PART NO.

DE38L

5111009710-xxx

## SPARE PARTS



## PART NO.

Icecrystal cover (DE38L)

7931002100

## EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Emergency battery back-up
- > Different mounting sets
- > Different louvers and diffusers
- > 4 inlets for cables max. Ø 13 mm

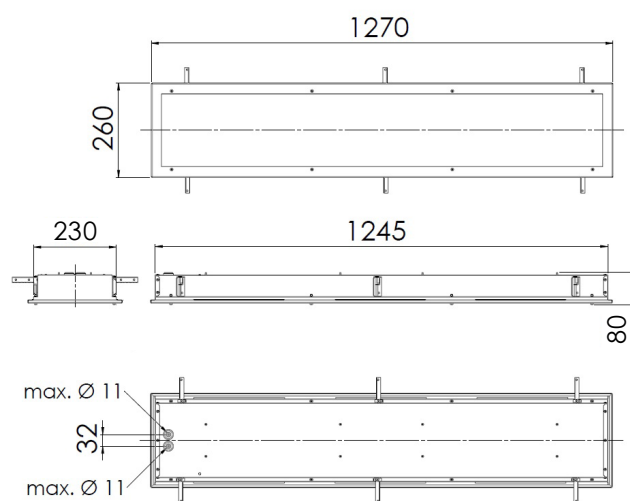

[mm]

