

CEILING LUMINAIRE FOR RECESSED INSTALLATION
IN PANEL CEILINGS (DAMPA DCC300)

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal or prismatic structure or parabolic louver
Mounting	Mounting brackets and side rails
Cable entry	2 inlets for cables max. Ø 11 mm
Protection class	IP20 / IP44 in conjunction with ceiling, IP20 with louver
Weight	12.3 kg
Light source	Linear LP LED modules
Wattage	Max. 40 W
CCT (color)	3,000 K or 4,000 K
Luminous flux	3,100 lm
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

DE95 DCC L

5111009510-xxx


SPARE PARTS

PART NO.

Ice crystal cover (DE95 DCC L) 7931001400

EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Emergency battery back-up
- > Alternative housing colors
- > Different diffusers available

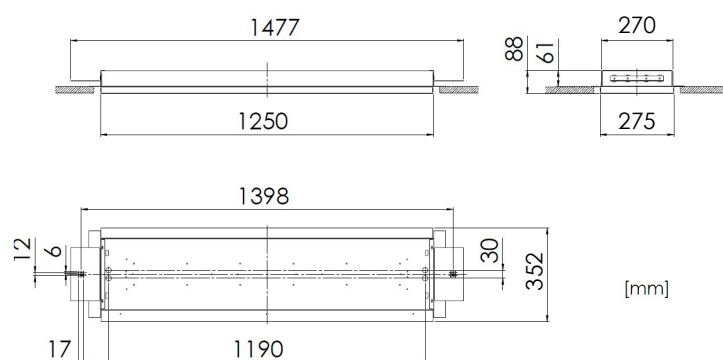

[mm]



LIGHTPARTNER GMBH & CO. KG
AM MOHRENSHOF 7 · 28277 BREMEN · GERMANY
+49 (0)421-87 195-0 · SALES@LIGHTPARTNER.DE

Technical modification reserved without prior notice

Find our complete
digital catalogue here:

