



ADJUSTABLE LED DOWNLIGHT WITH MAGNETIC COVER RING, APPLICABLE FOR PUBLIC AREAS, TILT +/-25° AND TURN 350°, FIXABLE POSITION

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Polycarbonate, black
<b>Decorative ring</b>	White RAL9010 (has to be ordered separately)
<b>Mounting</b>	Brackets for ceilings max. 30 mm
<b>Connection type</b>	Connection cable with Wago 5-pole plug
<b>Protection class</b>	IP20
<b>Weight</b>	0.6 kg
<b>Light source</b>	LED module
<b>Wattage</b>	Max. 12 W
<b>CCT (color)</b>	3,000–2,000 K (DimToWarm)
<b>Luminous flux</b>	650 lm
<b>CRI</b>	≥ 80
<b>Voltage</b>	120–240 V AC
<b>Frequency</b>	50–60 Hz
<b>Control mode</b>	DIM 1–10 V (if dimming signal is not connected, output is 3,000 K with 650 lm)

 PART NO.	BEAM
--	------

5556000200-022	25°
5556000200-020	40°
5556000200-021	60°

 PART. NO. RING	COLORS
--	--------



5532003500-001	RAL9010
----------------	---------

 SPARE PARTS	PART NO.
---	----------

Female connector Wago	7124003400
-----------------------	------------

 EXTRAS
--

- > Different connectors
- > Different finishes

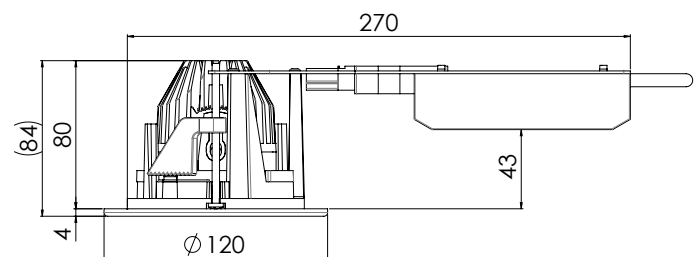

[mm]

