

HIGH POWER LED DOWNLIGHT WITH REFLECTOR
AND CHANGEABLE COVER RING,
FOR ACCOMMODATION AND PUBLIC AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black (RAL9005)
Decorative ring	Zinc coated steel, RAL9016
Cover	Clear glass
Reflector	Replaceable PC reflector, 55°
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Connection cable with Wago 3-pole plug
Protection class	IP20 / IP44 in conjunction with ceiling
Weight	0.8 kg
Light source	LED module
Wattage	Max. 19 W
CCT (color)	2,700 K
Luminous flux	2,000 lm
CRI	≥ 90
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

DL120

5404000610-001

SPARE PARTS


PART NO.

Female connector Wago

7124001800

EXTRAS

- > Dimmable DALI, DSI, switchDIM
- > Different connectors
- > Different beam angles
- > LED with high CRI and different color temperatures
- > Different finishes
- > Different covers
- > 3h battery back-up system

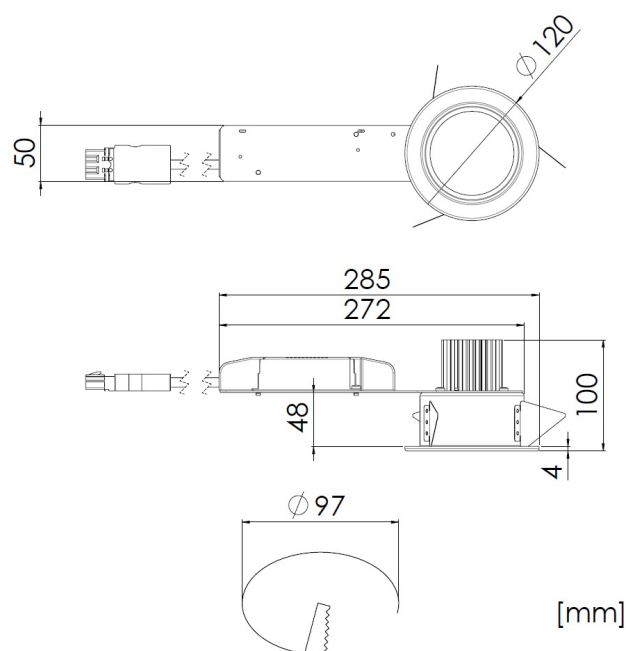

[mm]



LIGHTPARTNER GMBH & CO. KG
AM MOHRENSHOF 7 · 28277 BREMEN · GERMANY
+49 (0)421-87 195-0 · SALES@LIGHTPARTNER.DE

Technical modification reserved without prior notice

Find our complete
digital catalogue here:

