



DOWNLIGHT FOR ACCOMMODATION
AND PUBLIC AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Decorative ring	RAL9016, chrome or steel brushed (has to be ordered separately, see next page)
Mounting	Max. 6 mounting holes, \varnothing 4.5 mm
Connection type	Connection cable with Wago 3-pole plug
Protection class	IP20 / IP44 with lens
Weight	0.8 kg
Wattage	8W
Voltage	230V AC
Frequency	50–60 Hz




PART NO.

DL27

5503004000-001

★ EXTRAS

> Different connectors

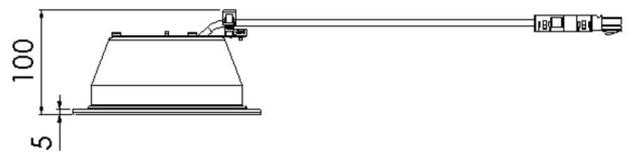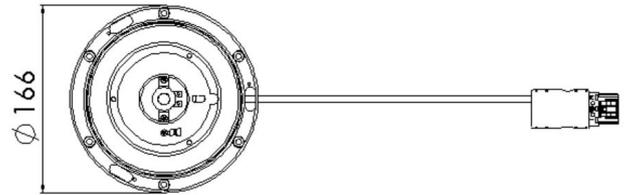



Ring A2, 5543000200-005
Steel / RAL9016 / Satin lens



Ring A2, 5543000200-003
Chrome / Satin lens



Ring A2, 5543000200-072
Steel / RAL9016 / Clear lens RED



Ring A2, 5543000200-053
Chrome / Clear lens RED



Ring A2, 5543000200-015
Steel brushed / Satin lens

Different finishes on request

