




WATERTIGHT LED DOWNLIGHT FOR BATHROOMS,
ACCOMMODATION AND PUBLIC AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Aluminium
Decorative ring	White (RAL9016)
Cover	Polycarbonate clear or opal
Mounting	2 fixing springs for ceilings max. 35 mm
Connection type	Connection cable with Wago 3-pole plug
Protection class	IP20 / IP55 in conjunction with ceiling
Weight	0.3 kg
Light source	LED array
Wattage	Eco: max. 6 W / HO: max. 12 W
CCT (color)	2,700 K
CRI	≥ 90
Voltage	230 V AC
Frequency	50–60 Hz

 PART NO.	BEAM	TYPE	LUMEN
5306007400-001	20°	Eco	750 lm
5306007400-002	40°	Eco	750 lm
5306007400-003	60°	Eco	750 lm
5306007400-004	Opal	Eco	550 lm
5306007500-001	20°	HO	1200 lm
5306007500-002	40°	HO	1200 lm
5306007500-003	60°	HO	1200 lm
5306007500-004	Opal	HO	850 lm

★ EXTRAS

- > Black baffle
- > Ring in chrome
- > Dimmable DALI or 1–10 V
- > 120 V AC execution
- > Different color temperatures
- > Different connectors

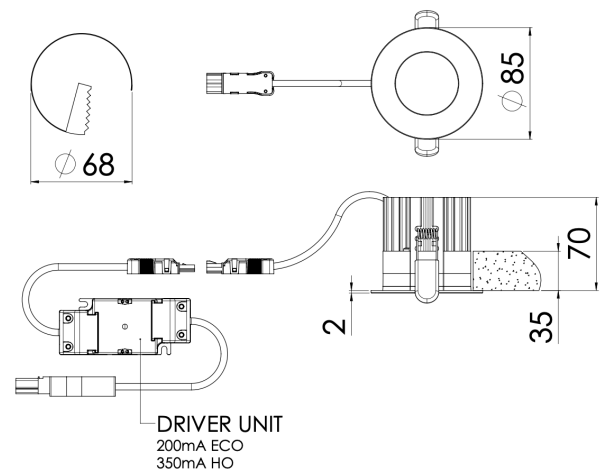

[mm]

