


SURFACE CEILING LUMINAIRE

DA110




3

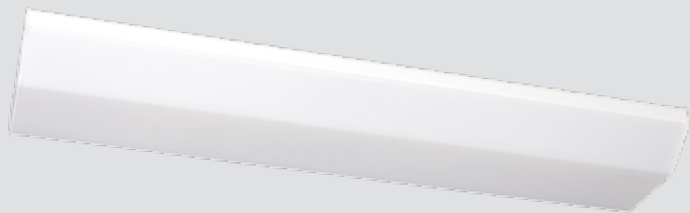

SURFACE MOUNTED CEILING LUMINAIRE FOR
PASSAGE WAYS, CABINS, LOUNGES AND
ACCOMODATION AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white
End caps	White polycarbonate
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes Ø 5.5 mm
Cable entry	2 inlets for cables max. Ø 13 mm
Protection class	IP20
Voltage	220-240 VAC
Frequency	50-60 Hz

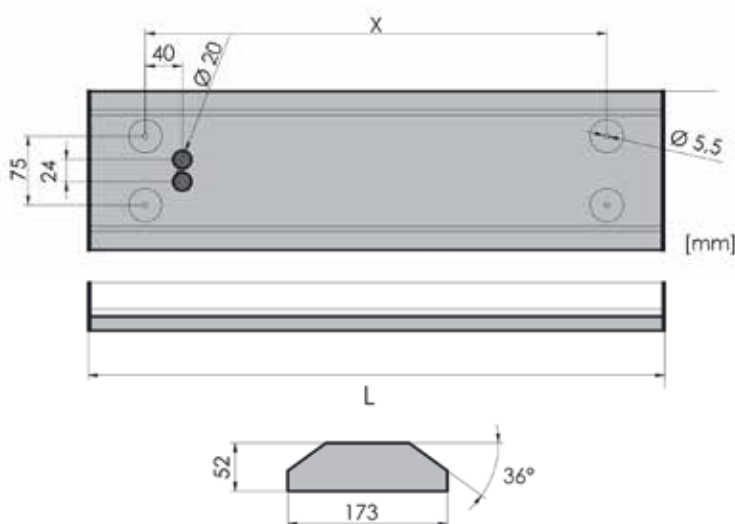

LED SOLUTION

DA110S	5112007300-001
DA110L	5112007400-001
Light source	Linear LP LED modules
Wattage	Max. 20 W /max. 40 W
CCT (color)	3,000 K
CRI	≥ 80
Weight	2.2 kg (DA110S) 4.0 kg (DA110L)

FLUORESCENT SOLUTION

DA110 2x 14 W	5112005000-001
DA110 2x 28 W	5112005300-001
Light source	T5 fluorescent tubes (included)
Wattage	2x 14 W 2x 28 W
Lamp base	G5
Weight	1.7 kg (2x 14 W) 2.5 kg (2x 28 W)

SPARE PARTS

PART NO.

Cover (DA110S)	7112021600
Cover (DA110L)	7112031900
End cap	7504000600

★ EXTRAS

- > 24 V DC execution
- > 120 V AC execution
- > Dimmable
- > Different color temperatures

TYPE	L	X
DA110S	623	500
DA110L	1270	980

