

RECESSED CEILING LUMINAIRE

DE29S




3



RECESSED MOUNTED CEILING LUMINAIRE
FOR PASSAGE WAYS, LOUNGES, DINING ROOMS
AND ACCOMMODATION AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9010)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	Mounting set for ceilings, 23-55 mm
Cable entry	2 inlets for cables max. Ø 13 mm
Protection class	IP20 / IP44 in conjunction with ceiling
Voltage	220-240 V AC
Frequency	50-60 Hz

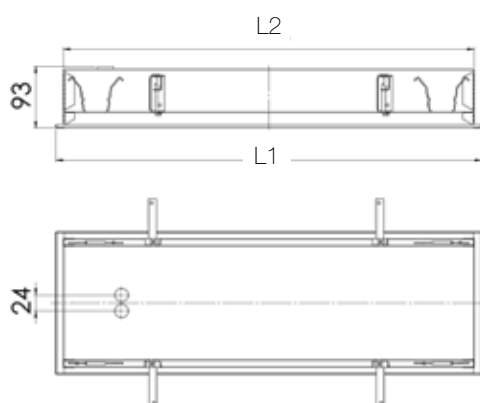

LED SOLUTION

DE29SS	5111009200-xxx
DE29SL	5111009300-xxx
Light source	Linear LP LED modules
Wattage	Max. 20 W / max. 40 W
CCT (color)	3.000 K or 4.000 K
Luminous flux	DE29SS: 1,500 lm DE29SL: 3,100 lm
CRI	≥ 80
Weight	3.3 kg (DE29SS) 5.5 kg (DE29SL)

FLUORESCENT SOLUTION

DE29S 2x 18 W	5111005600-015
DE29S 2x 36 W	5111005000-017
Light source	T8 fluorescent tubes (not included)
Wattage	2x 18 W 2x 36 W
Lamp base	G13
Weight	3.3 kg (DE29S 2x 18 W) 5.5 kg (DE29S 2x 36 W)

SPARE PARTS

PART NO.

Icecrystal cover (DE29SS)	7112026800
Icecrystal cover (DE29SL)	7112021800

★ EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > B0-execution
- > Different cable entries

TYPE	L1	L2	X
DE29SS	636	614	625
DE29SL	1246	1225	1235

