

BERTH LIGHT, SURFACE

KJ144



4

LED SOLUTION

| | |
|--------------|----------------------|
| KJ144XS | 5117008500-001 |
| KJ144S | 5117008300-xxx |
| Light source | Linear LP LED module |
| Wattage | Max. 6 W / max. 10 W |
| CCT (color) | 3,000 K |
| CRI | ≥ 80 |

FLUORESCENT SOLUTION

| | |
|---------------|---|
| KJ144 11 W TC | 5117000800-005 |
| KJ144 18 W T8 | 5117001200-005 |
| Light source | Compact or T8 fluorescent lamp (not included) |
| Lamp base | 2G7 / G13 |
| Wattage | 1x 11 / 1x 18 W |



SPARE PARTS
PART NO.

| | |
|---------------|------------|
| Cover KJ144XS | 7112020200 |
| Cover KJ144S | 7112028900 |
| End cap left | 7504000400 |
| End cap right | 7504000500 |

★ **EXTRAS**

- > 120 V AC execution
- > KJ144S LED with battery back-up
- > Different color temperatures

| TYPE | L1 | L2 | X | Weight |
|---------|-----|-----|-----|--------|
| KJ144XS | 325 | 273 | 180 | 0.8 kg |
| KJ144S | 675 | 550 | 326 | 1.5 kg |

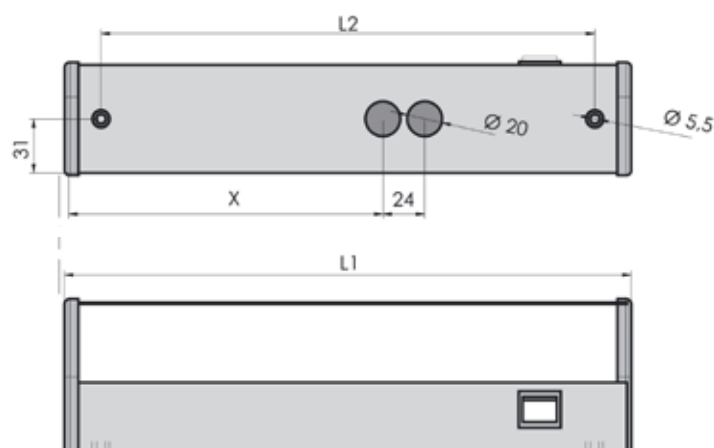

BERTH LIGHT WITH SWITCH,
FOR ACCOMODATION AREAS

| | |
|-------------------------|--|
| Design | According to rules of maritime classification societies and relevant standards |
| Housing | Galvanized steel, powder coated white (RAL9016) |
| End caps | Polycarbonate, white |
| Diffuser | Polycarbonate, opal |
| Switch | On / off switch, 2-pole |
| Mounting | 2 mounting holes, Ø 5.5 mm |
| Cable entry | 2 inlets for cables max. Ø 13 mm |
| Protection class | IP30 |
| Voltage | 220-240 V AC |
| Frequency | 50-60 Hz |

