




FLOODLIGHT

# ST76S



ROBUST PORTABLE STAINLESS STEEL FLOODLIGHT

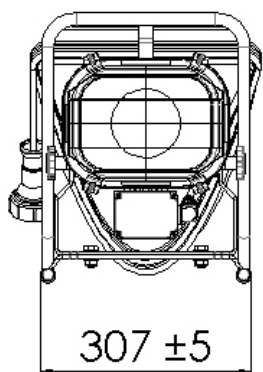






[mm]

MB6.101.0005.00

## STANDARD CONFIGURATION

Housing	Stainless steel, 1.4404 (AISI 316L), seamless deep drawn, powder coated white (RAL9016)
Safety pane	Tempered glass, DIN 12150, partially lacquered
Connection type	20 m cable with plug
Protection class	IP56
Weight	8.9 kg
Light source	LED array
Wattage	25 W
Luminous flux	3,000 lm
CCT (color)	5,700 K
CRI	≥ 80

## AVAILABLE FEATURES

	EMI proof
	Vibration resistant
	NVG compatible
	Adaptation light
	Various optics

## YOUR REQUIREMENTS

Please contact us for different configurations or further information on this luminaire type. Based on your requirements, the final part number will be provided.

Technical modification reserved without prior notice.



LIGHTPARTNER LICHTSYSTEME GMBH & CO. KG  
AM MOHRENSHOF 7 · 28277 BREMEN · GERMANY  
+49 (0)421 - 87 195 - 0 · SALES@LIGHTPARTNER.DE

# LIGHTPARTNER NAVY